TANK LEVEL INDICATORS



FPC-12708 - DUAL

HARDWARE FEATURES

Enclosure:

- IP44 weatherproof rating
- Powder coated mild steel
- Removable gland plate Protection:

Low voltage control and input circuitry

- Control & interface:
- 2x Process meter LED displays
- Displays be configured to read depth (m/mm), percentage full, or capacity (litres)


Inputs:

• 2x analogue 4-20mA inputs for hydrostatic transducers Included with panel:

- 10 Amp 3 pin 1.5m power supply lead
- 2x stainless steel potable water hydrostatic pressure transducers (0-4m rating) with 24m cable

FUNCTION FEATURES

 Provides an extremely accurate and informative indication of water level within two tanks

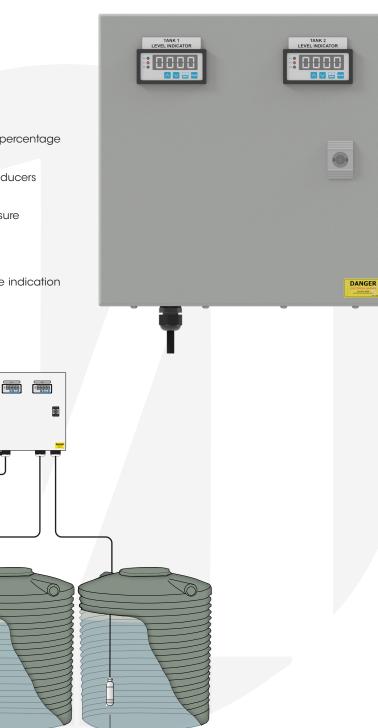

HYDROSTATIC PRESSURE TRANSDUCER HYDROSTATIC PRESSURE TRANSDUCER

SINGLE PHASE (230VAC) - FPC-12708

Code	Description	Enclosure Size
FPC-12708	Tank Level Indicator - Dual	300x300x150mm

P: 1800 281 282 | F: 1300 281 282 | E: info@matelecaustralia.com.au | W: www.matelecaustralia.com.au Specifications are subject to change without notice | Images are a guide only and may differ from actual product