

# IP68 WATERPROOF CABLE CONNECTORS

## SPECIFICATIONS

- **Materials:** Grommet - TPE - V  
Gasket - Silicone  
Tube & Glands - PA66 UL 94 V2  
Screws - Zinc passivated steel  
Connector - Nickel plated brass
- **Current Rating:** 3 Pole - 32 Amps, 240 Vac  
5 Pole - 32 Amps, 415 Vac
- **Temperature Rating:** 85 °C
- **IP Protection:** IP68



FCN-16250


FCN-16245

## CABLE SIZING


	Min Cable OD (mm)	Max Cable OD (mm)
3 Pole	3.7	8.1
5 Pole	5	11.9

## DIMENSIONS

	A (mm)	B (mm)	C (mm)
3 Pole	25	67.5	30
5 Pole	30	67.5	35

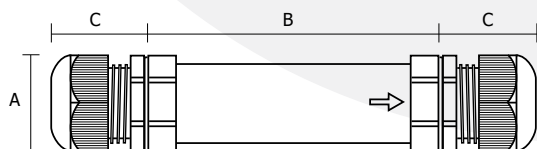

## INSTALLATION

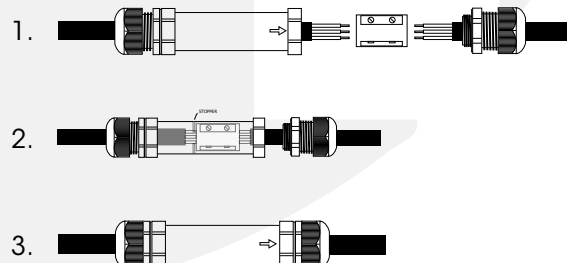

## IP68 WATERPROOF CABLE CONNECTORS

Code	Description	Packing	MOQ	Ctn
FCN-16245	IP68 Waterproof Cable Connector - 3 Pole 32 Amp	1	1	10
FCN-16250	IP68 Waterproof Cable Connector - 5 Pole 32 Amp	1	1	10