


STRIP CONNECTORS

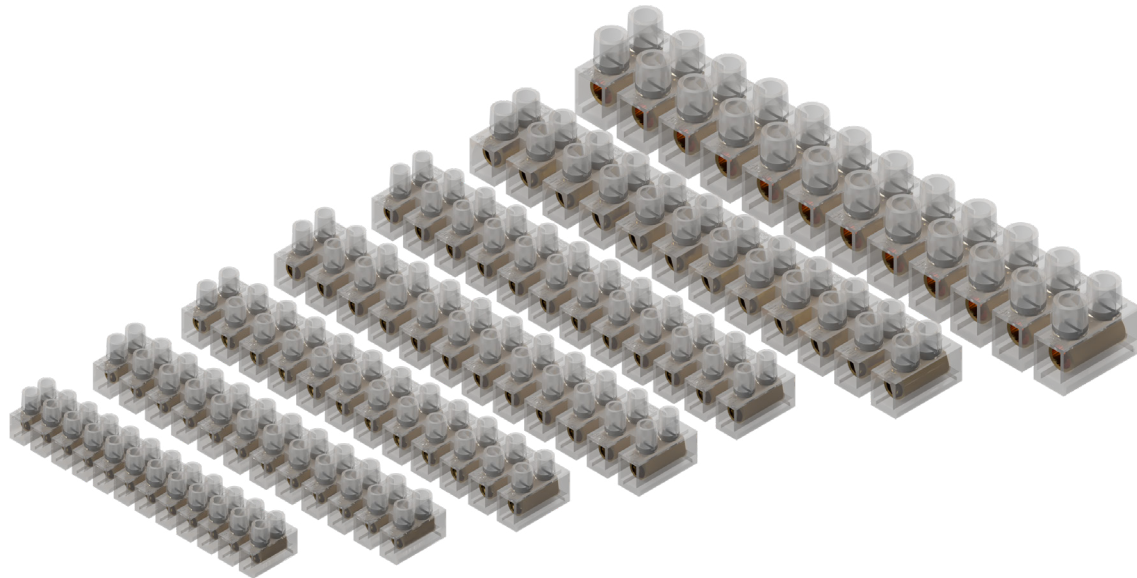

FEATURES & BENEFITS

- 12 pole / 2 way
- Flat head screws.
- Flexible and pliable material

SPECIFICATIONS

Materials:

- Connector - Solid brass

Temp. rating:


- Up to 90°C

Voltage:

- 380V

DIMENSIONS

Code	Length (mm)	Height (mm)	Width (mm)	Cable Entry (mm)	Mounting Spacing (A) (mm)
STC-M4/3A	93	13.5	17	3.0	8
STC-M6/5A	113	13	16	3.5	9.5
STC-M10/10A	129	16	21	3.8	11.5
STC-M12/15A	138	17	22.5	4.2	11.5
STC-M14/20A	140	17.5	22	4.7	12.0
STC-M16/30A	166	18.5	25.5	5.5	14.5
STC-M25/60A	185	26	30	6.4	16.1



STRIP CONNECTORS RANGE

Code	Description	Amp Rating	Packing	MOQ	Ctn
STC-M4/3A	4mm ² - Natural	3 Amp	10	10	1000
STC-M6/5A	6mm ² - Natural	5 Amp	10	10	800
STC-M10/10A	10mm ² - Natural	10 Amp	10	10	400
STC-M12/15A	12mm ² - Natural	15 Amp	8	8	480
STC-M14/20A	14mm ² - Natural	20 Amp	10	10	400
STC-M16/30A	16mm ² - Natural	30 Amp	6	6	360
STC-M25/60A	25mm ² - Natural	60 Amp	10	10	200