

INSTRUCTIONS



Congratulations on your purchase of the FKW-18110 Single Phase Import, Active Power Kilowatt Hour Meter.

SPECIFICATIONS

Accuracy Class:

Max Rated Current:5 (100) ANominal Voltage:230VacNominal Frequency:50HzStarting Current:20mA

Test Output Flash Rate: 1000 imp/kWh

LCD Display: Backlit, 5 integers, 3 decimals

Max Cable Capacity: 25mm²
Operating Temperature: -40°C - +70°C
No of Tariffs: Single Tariff

Standards: IEC62052-11, IEC62053-21

Warranty: 1 Year
Backup Battery Life: 10 years
Weatherproof Rating: IP54

Note - Not suitable for solar applications


IMPORTANT SAFETY INFORMATION

This product must be installed in accordance with local and state regulations, and may only be installed by a licensed electrician.




INSTRUCTIONS

OVERVIEW

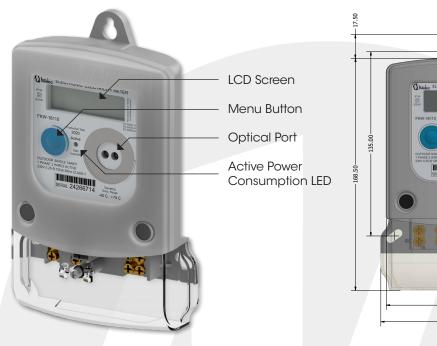


DIMENSIONS



Dimensions are in mm.

WIRING DIAGRAM

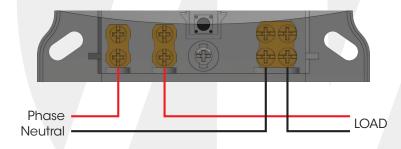

OPERATING INFORMATION

LCD - The Meter displays energy data and other parameters on its 5 integer, 3 decimal, LCD screen. LCD Menus are browsed by pressing the menu button.

Active power consumption - Each light pulse indicates 1 Wh active power consumption.

Optical Port - This is for programming purposes only. If this is required, unit must be returned to MATelec Australia.

Screen Displays

Screen 1 (1.8.0) - Displays the Total Consumption in kWh. This is non resettable.

Screen 2 (1.6.0) - Demand Screen. Indicates the maximum positive active energy demand value for a determined time interval.

WARRANTY

The FKW-18110 carries a 12 month warranty. Please contact MATelec Australia with any queries in this regard.