

PRESENCE SENSOR - 360° CEILING MOUNT



SURFACE MOUNT - MICROWAVE

MICROWAVE
TECHNOLOGY

FEATURES & BENEFITS

- Optimised presence detection, perfect for open plan offices
- Detects movement through most glass, thin walls and some doors
- High sensitivity to movement
- Occupancy feature - High and low sensing zones
- Easy access to setting controls under front cover
- Stainless steel fixings supplied
- 3 year warranty.



SPECIFICATIONS

Mounting:

- Surface ceiling

Weatherproof rating:

- IP20, interior

Detection angle:

- 360° downward

Detection range:

- Up to 16 metres

Switching capacity:

- 300W (LED)
- 300W (fluorescent)
- 800W (incandescent)

Min LED load:

- 1W

Manual override:

No

Colour:

- White

Adjustments:

- Time, lux & sensitivity

Time delay:

- 10 sec - 12 mins

Lux adjustment:

- Dawn to dusk
(2-2000lux)

Voltage:

220 - 240 Vac 50/60Hz

Dimensions:



- 102mm Ø x 24mm (H)

Certification:

- SAA

HF system:

- 5.8 GHz CW Radar ISM Band

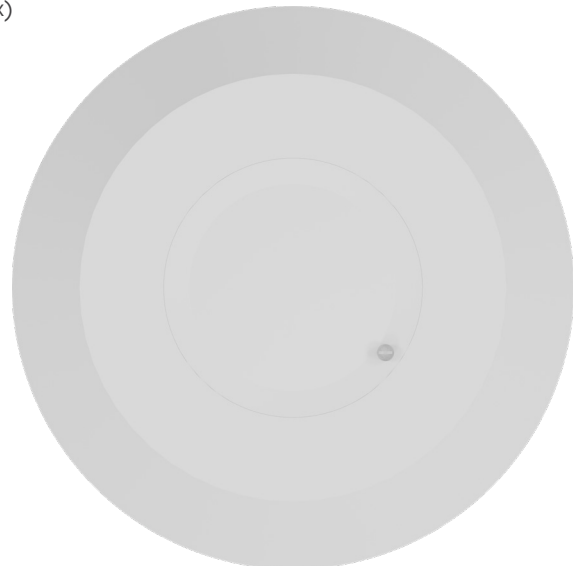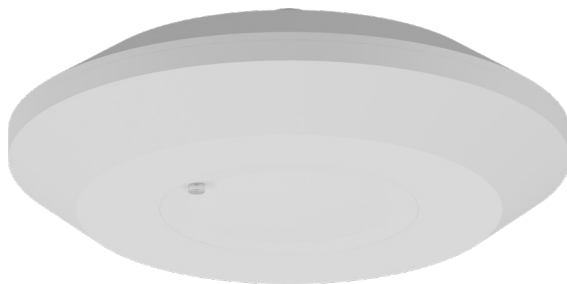

Code	Description	Packing	MOQ	Ctn
FMS-13500	Microwave Presence Sensor - 360° Surface Ceiling Mount	1	1	50